

15A/125V 2-POLE / 3-WIRE REPLACEMENT AC PLUG

INSTALLATION INSTRUCTIONS
OVERVIEW

The Cable Matters 15A/125V 2-Pole / 3-Wire Replacement Plug terminates a 14AWG cord. Replace broken appliance cord plugs or create a custom-length cord.

! CAUTION

- Installation by a qualified electrician is recommended
- Rated for indoor use only in a dry location
- Use only 14AWG stranded copper cords

WIRING INSTRUCTIONS - READ BEFORE INSTALLING


1) Turn off the power of any appliance before replacing the plug!

2) Carefully remove the existing plug.

3) Strip back about 1 inch of the cord jacket from the existing cord.


4) Strip back about 0.4 inches of the wire insulation from each conductor and remove any filler.



5) Remove 1 screw from the strain-relief bracket. Loosen the screw on the other side and rotate the bracket to the outside. Requires a Phillips head screwdriver (not included).

6) Slide the cord through the strain-relief bracket and loosely re-attach the screws to prevent the housing from sliding down the cord.

7) Green screw is for the ground wire, brass is for the black/hot wire, and silver is for the white/neutral wire.

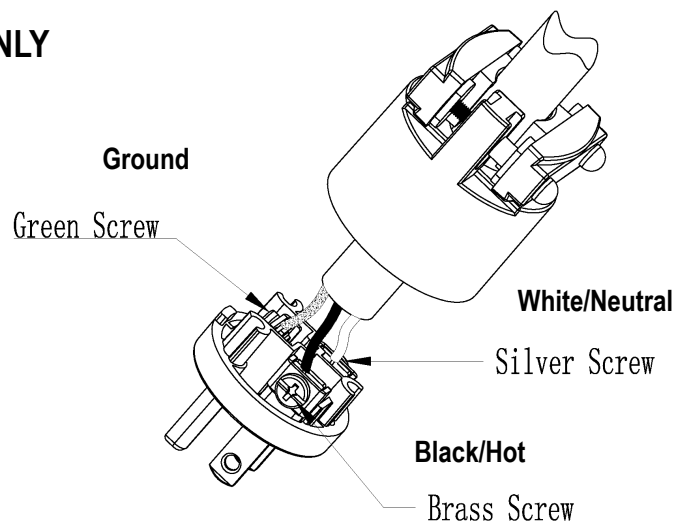


8) Remove each screw and clamp, one at a time, starting with the green/ground screw.

9) Tightly twist the strands into a hook and coil it around the screw. Reconnect the screw and clamp. Check that the insulation is not touching the terminal.


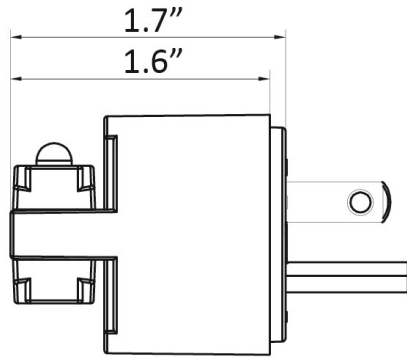
10) Tighten the terminal screws and check that all wires are properly separated. Tug on the wires to check that they are firmly seated.

11) Line up the plug with the housing and tighten the screws. Tighten the screws on the SR bracket. **NOTE: DO NOT over-tighten the screws!**

14 AWG STRANDED WIRE ONLY


15A/125V 2-POLE / 3-WIRE REPLACEMENT AC PLUG**TECHNICAL SPECIFICATIONS**

- Electrical Rating: 15A/125VAC 1875W
- NEMA 5-15P Straight-Blade
- 2 Pole / 3 Wire with U-Ground
- Residential Grade/Indoor Use
- Cord Compatibility: 14 AWG stranded wire
- S, SJ, SJT, SJE cord jackets up to 0.6" diameter
- Compliance: UL Listed
- Housing Dimensions (from outlet): 1.7 Inches
- Circumference: 1.6 Inches
- Warranty: Limited Lifetime

**IMPORTANT NOTES:**

Fire risk! Do not exceed the electrical rating.
Do not use solid wire, only stranded wire cords
Specifications are subject to change without notice

Package Contents

3x 15A/125V AC Receptacle Plug
1x Installation Instructions

Copyright and Trademarks

Cable Matters is a registered trademark or trademark of Cable Matters Inc. All rights reserved. All other trademarks are the property of their respective owners.

Limitation of Liability

In no event shall Cable Matters Inc. (including their officers, directors, employees or agents) be liable for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of data, loss of business, or any pecuniary loss, arising out of, or related to the use of this product exceeding the actual price paid for the product (as allowed by state law).

Warranty Information

This product is backed by a limited one-year warranty. The warranty covers parts and labor costs only. Cable Matters does not warrant its products from defects or damages arising from misuse, abuse, or normal wear.

Customer Support and Contact Information

Cable Matters offers lifetime technical support as an integral part of our commitment to provide industry leading solutions.

Contact us at wholesale@cablematters.com for large volume discount pricing.

Contact support@cablematters.com with any questions